

Motor Comparison for 151-0613



Category	Existing Model	Replacement Model
Material Number	151-0613	11185743
Basic Motor	OMP	OMP X
Displacement	125	125
Series	8	X
Active	Yes	Yes
Mounting Flange	A2	A2
Mounting Thread Dimension	None	None
Shaft Style	Cylindrical	Cylindrical
Shaft Size	25 mm	25 mm
Shaft Key	A8 x 7 x 32 mm (DIN 6885)	A8 x 7 x 32 mm (DIN 6885)
Port Style	Side port - Offset	Side port - Offset
Port Dimension	G 1/2	G 1/2
Drain Port Style	Standard	Standard
Drain Port Dimension	G 1/4	G 1/4
Brake Release Port	None	None
Brake Release Port Dimension	None	None
Painted	None	None
Special Features External 1	None	None
Special Features External 2	None	None
Special Features External 3	None	None
Dust Seal	Standard - HPS	Int. in shaft seal
Shaft Seal	HPS - 200	HPS - 225
Seal Kit	151-1286	11188319
Front Bearing	Journal bearing	Journal bearing
Rear Bearing	Journal bearing	Journal bearing
Gear Wheel Set	Standard	Standard
Check Valve	No	Yes
Valve Function	None	None
Special Features Internal 1	None	None
Special Features Internal 2	None	None

Packing	Single pack	Single pack
Option Type	Standard	Standard

Technical Data Comparison for 151-0613

Category	Existing Model	Conversion Model
Type	OMP	OMP X
Motor size	125	125
Geometric displacement	125 [7.65]	125 [7.65]
Max speed cont	480	480
Max speed int	600	600
Max torque cont	240 [2120]	270 [2390]
Max torque int	290 [2570]	335 [2965]
Max output power cont	10.0[13.4]	11.0 [14.8]
Max output power int	12.0[16.1]	13.0 [17.4]
Max pressure drop cont	140 [2030]	160 [2320]
Max pressure drop int	175 [2540]	200 [2900]
Max pressure drop peak		
Max oil flow cont	60 [15.9]	60 [15.9]
Max oil flow int	75 [19.8]	75 [19.8]
Max start pressure with unloaded shaft	9 [130]	9 [130]
Min start torque at max press drop cont	210 [1860]	240 [2125]
Min start torque at max press drop int	270 [2390]	300 [2655]
Max inlet pressure cont	175 [2540]	200 [2900]
Max inlet pressure int	200 [2900]	225 [3260]
Max inlet pressure peak		
Max return pressure with drain line cont	175 [2540]	200 [2900]
Max return pressure with drain line int	200 [2900]	225 [3260]
Max return pressure with drain line peak		
Holding torque		
Min brake release pressure		
Max pressure in brake line		
Max pressure in drain line		

Fit and Appearance

Illustration AB – Is
OMP / OMR / DH / DS OMPW / OMPW N
None seal guard groove

Illustration AB – Will be
OMP X / OMR X OMPW X / OMPW X N
All motors will have a seal guard groove in the front cover


App_AB_v1

App_AB_v1

Illustration AF – Is
OMP / OMR / DH / DS OMPW / OMPW N
Product label incl. bar code

Illustration AF – Will be
OMP X / OMR X OMPW X / OMPW X N
Product label incl. bar code and data matrix code


App_AF_v1

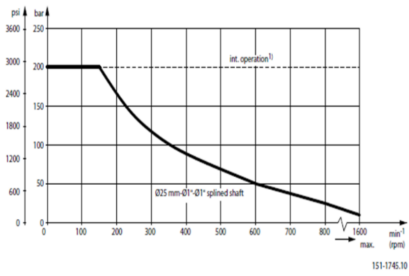
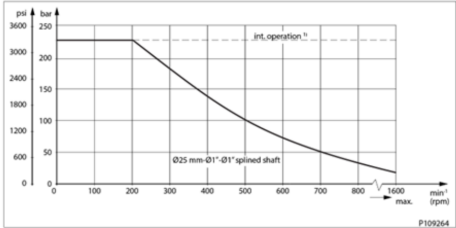
App_AF_v1

Illustration AP – Is
OMP / OMR / DH / DS OMPW / OMPW N
Current packaging insert for the cardboard box.

Illustration AP – Will be
OMP X / OMR X OMPW X / OMPW X N
Improved packaging insert for the cardboard box.
The new carton made of paper pulp is an environmental friendly material – 100% recyclable, biodegradable and compostable.
In the current packaging solution, the oil is softening the packaging box.
The new paper pulp carton is form resistant to oil.


App_AP_v1

App_AP_v1

Illustration CCC – Is
OMP / OMR / DH / DS / OMPW / OMPW N
OMP and OMR – 200 bar shaft seal

Illustration CCC – Will be
OMP X / OMR X / OMPW X / OMPW X N
OMP X and OMR X – 225 bar shaft seal


Fun_CCC_v1

Fun_CCC_v1