



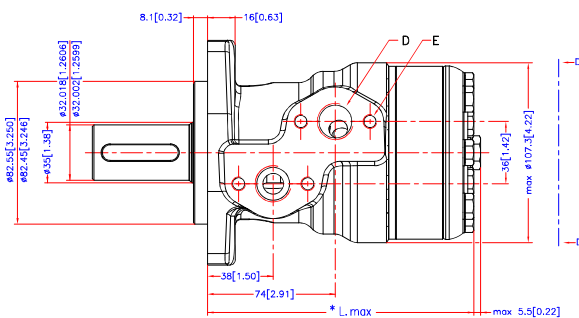


Reset



| Code Number | CCM | * L _{max} mm/inch |
|-------------|-----|----------------------------|
| 151-0248 | 50 | max. 137.8 [5.43] |
| 151-0242 | 80 | max. 142.8 [5.62] |
| 151-0243 | 100 | max. 146.2 [5.76] |
| 151-0208 | 125 | max. 150.6 [5.93] |
| 151-0244 | 160 | max. 156.6 [6.17] |
| 151-0245 | 200 | max. 163.6 [6.44] |
| 151-0247 | 250 | max. 172.3 [6.78] |
| 151-0246 | 315 | max. 183.6 [7.23] |
| 151-6294 | 375 | max. 193.8 [7.63] |

C: Drain connection
G 1/4; 12 [0.47] deep
D: G 1/2; min 15 [0.59] deep
E: M8; 13 [0.51] deep

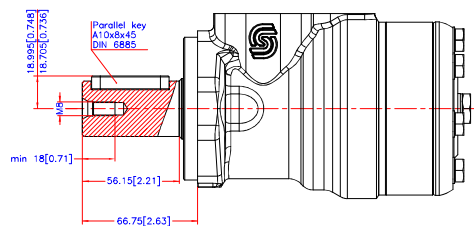

| Alt | Reason | Date | Scale | Projection |
|-----|--------|------|-------|-------------|
| - | - | - | 1:1 | First Angle |
| - | - | - | - | - |
| - | - | - | - | - |
| - | - | - | - | - |
| - | - | - | - | - |
| - | - | - | - | - |
| - | - | - | - | - |
| - | - | - | - | - |
| - | - | - | - | - |

Danfoss

| |
|----------------|
| OMR |
| Shaft Ø32 mm. |
| No. 8_151D0316 |

Tolerance for basic dimensions = ±1 mm (0.04 inch)